


Jaw & Jaw Turnbuckles

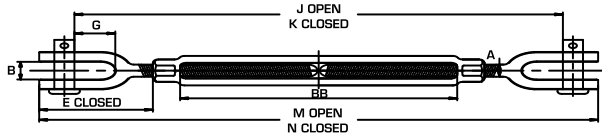

Thread Dia & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)								
			A	B	E Closed	G	J Open	K Closed	M Open	N Closed	BB
1/4x4	500	0.36	0.25	0.45	1.58	0.62	10.90	6.90	11.90	7.90	4.00
5/16x4-1/2	800	0.52	0.31	0.50	1.98	0.87	12.36	8.36	13.90	9.40	4.50
3/8x6	1200	0.81	0.38	0.54	2.12	0.87	16.14	10.14	17.38	11.38	6.00
1/2x6	2200	1.50	0.50	0.68	2.75	1.06	17.50	11.50	19.00	13.00	6.00
1/2X9	2200	1.74	0.50	0.68	2.75	1.06	23.50	14.50	25.00	16.00	9.00
1/2x12	2200	2.40	0.50	0.68	2.75	1.06	29.50	17.50	31.00	19.00	12.00
5/8x6	3500	2.72	0.63	0.82	3.50	1.31	18.80	12.80	20.88	14.88	6.00
5/8X9	3500	3.24	0.63	0.82	3.50	1.31	24.80	15.80	26.88	17.88	9.00
5/8x12	3500	3.74	0.63	0.82	3.50	1.31	30.80	18.80	32.88	20.88	12.00
3/4x6	5200	4.11	0.75	1.03	4.18	1.50	20.00	14.00	22.60	16.60	6.00
3/4X9	5200	5.10	0.75	1.03	4.18	1.50	26.00	17.00	28.60	19.60	9.00
3/4x12	5200	5.65	0.75	1.03	4.18	1.50	32.00	20.00	34.60	22.60	12.00
3/4x18	5200	7.00	0.75	1.03	4.18	1.50	44.00	26.00	46.60	28.60	18.00
7/8x12	7200	8.17	0.88	1.23	4.85	1.75	33.36	21.36	36.32	24.32	12.00
7/8X18	7200	9.96	0.88	1.23	4.85	1.75	45.36	27.36	48.32	30.32	18.00
1X6	10000	8.50	1.00	1.31	5.53	2.06	22.72	16.72	26.06	20.06	6.00
1x12	10000	12.00	1.00	1.31	5.53	2.06	34.72	22.72	38.06	26.06	12.00
1X18	10000	14.00	1.00	1.31	5.53	2.06	46.72	28.72	50.06	32.06	18.00
1X24	10000	17.00	1.00	1.31	5.53	2.06	58.72	34.72	62.06	38.06	24.00
1-1/4X12	15200	21.50	1.25	1.86	7.21	2.81	37.34	25.34	41.54	29.54	12.00
1-1/4x18	15200	24.25	1.25	1.86	7.21	2.81	49.34	31.34	53.54	35.54	18.00
1-1/4x24	15200	28.00	1.25	1.86	7.21	2.81	61.34	37.34	65.54	41.54	24.00
1-1/2x12	21400	30.50	1.50	2.25	7.88	2.81	38.50	26.50	43.50	31.50	12.00
1-1/2x18	21400	36.75	1.50	2.25	7.88	2.81	50.50	32.50	55.50	37.50	18.00
1-1/2x24	21400	40.67	1.50	2.25	7.88	2.81	62.50	38.50	67.50	43.50	24.00
1-3/4x18	28000	55.04	1.75	2.60	9.40	3.38	53.38	35.38	59.18	41.18	18.00
1- 3/4x24	28000	63.36	1.75	2.60	9.40	3.38	65.38	41.38	71.18	47.18	24.00
2x24	37000	94.25	2.00	2.62	11.86	3.69	69.54	45.54	76.72	52.72	24.00

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized