


Grade 80 Fittings



How to use YOKE Self Locking Hook?



Eye Self Locking Hook. Code "YC"

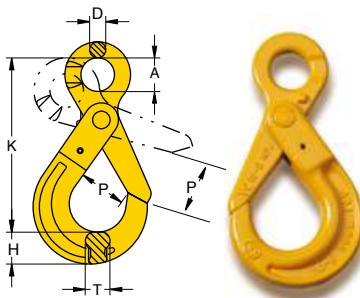


ABS
Type Approval

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)						N.W. lbs
	lbs*	tonnes*		A	D	H	K	P	T	
8-025-06	2,500	1.12	7/32	0.83	0.39	0.75	4.33	1.14	0.59	1.1
8-025-07	4,500	2.0	1/4-5/16	0.98	0.44	0.94	5.35	1.34	0.79	1.8
8-025-10	7,100	3.15	3/8	1.26	0.51	1.19	6.57	1.77	1.02	3.1
8-025-13	12,000	5.3	1/2	1.56	0.62	1.57	8.15	2.13	1.19	6.4
8-025-16	18,100	8.0	5/8	2.05	0.83	1.93	9.92	2.44	1.42	12.6
8-025-20	28,300	12.5	3/4	2.52	0.91	2.36	11.10	3.54	1.91	18.7
8-025-22	34,200	15.0	7/8	2.75	0.94	2.48	12.56	3.14	2.12	27.6
8-025-26	47,700	21.2	1	3.15	0.98	2.72	13.50	3.90	2.20	32.0
8-025-28	55,100	24.8	1-1/8	3.54	1.10	3.18	15.80	4.72	2.48	54.9

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Clevis Self Locking Hook. Code "YD"

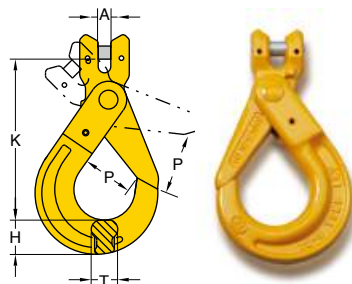

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. lbs
	lbs*	tonnes*		A	H	K	P	T	
8-026-06	2,500	1.12	7/32	0.24	0.75	3.94	1.14	0.59	1.1
8-026-07	4,500	2.0	1/4-5/16	0.35	0.94	4.69	1.34	0.79	1.8
8-026-10	7,100	3.15	3/8	0.43	1.19	5.63	1.77	1.02	3.1
8-026-13	12,000	5.3	1/2	0.55	1.57	7.05	2.13	1.19	6.4
8-026-16	18,100	8.0	5/8	0.71	1.93	8.35	2.44	1.42	12.4
8-026-20	28,300	12.5	3/4	0.83	2.36	9.56	3.54	1.91	19.4
8-026-22	34,200	15.0	7/8	0.95	2.48	10.70	3.14	2.12	28.2

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677